

### WHAT YOU'LL NEED

- A USB 2.0 or higher flash drive with at least 16 GB capacity.
- A computer with a high-speed Internet connection.
- At least one hour of time.

### FORMAT THE DRIVE

#### STEP ONE

Insert the USB drive into an available USB port on your computer.

#### STEP TWO

On your computer, locate the "Removable Disc" for the flash drive.

#### STEP THREE

Right-click and then select "Format" from the sub-menu.

#### STEP FOUR

Click "Start." When the warning message appears, click "Ok." (Note: this step will erase all existing content from the drive.)

#### STEP FIVE

Select "NTFS." from the drop down menu and click "Start."

#### STEP SIX

Click "Ok" when the "Warning" message appears.

#### STEP SEVEN

Click "Ok" when the "Format Complete" message appears.

### DOWNLOAD THE SOFTWARE

#### STEP ONE

Download the software to your computer.

#### STEP TWO

Save the file (swdl.iso) to your computer. Do not change the file name.


#### STEP THREE

Copy the file (swdl.iso) onto your USB drive, without changing the file name.

#### STEP FOUR

Once the download is complete, remove the USB drive from your computer.

# UPDATE YOUR GOLD WING

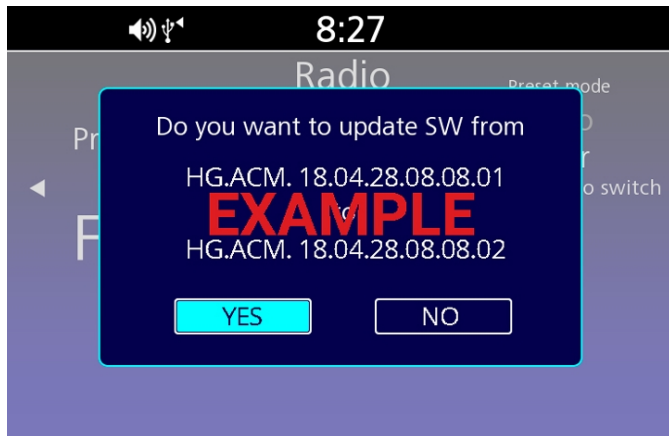


## 1. START INSTALLATION

Connect the USB Drive containing the downloaded file to your motorcycle. Gold Wing Airbag models have the USB connector located in the trunk; all other Gold Wing models have the connector located in the center storage compartment in front of the seat.

Turn your bike's ignition switch twice to the right to engage the ACC position. Within one minute, a message should come up on your dashboard screen: "Do you want to update?"


Using either the left handlebar Four-way key/ENT Switch or the Center Panel Interface Dial navigate the menu to "Yes," and press "Enter."

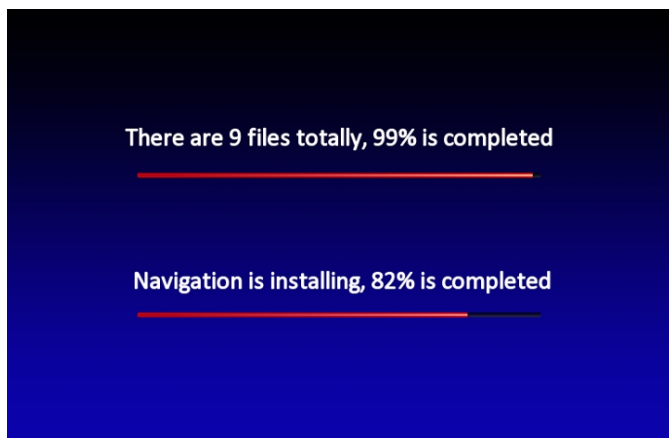

## 2. CONTINUE INSTALLATION

The installation may take as long as an hour, but may be shorter depending on the update and region. The screen will show you approximately how much of the download has completed. Your Gold Wing's ignition switch must remain in the ACC position for the entire duration of the update. Do not start your motorcycle.

Towards the end of the update, the screen may show "99 percent complete" for several minutes. This is normal; let the system finish completely.

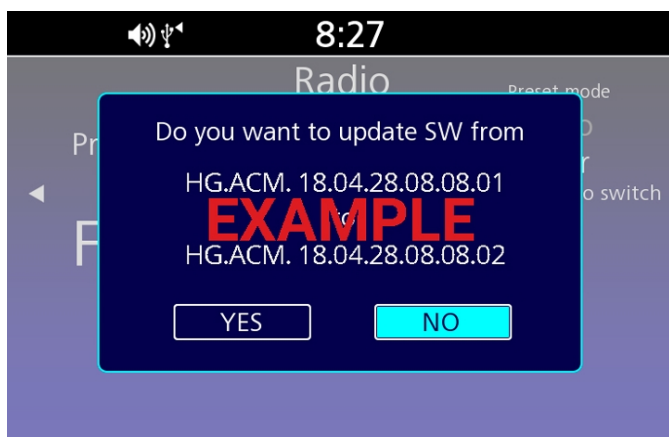

## 3. COMPLETE INSTALLATION

When the installation is complete, the initial screen appears again and will ask if you want to update the system. Select "No" and remove the USB drive.

*Note that updating your navigation system overwrites your favorites and history, and resets your "beep" volume to the default value. Updating the system will not affect XM/FM presets.*

## REFERENCE

### 1. Where To Find Your USB Connector



#### ON ALL GOLD WING MODELS EXCEPT THOSE WITH AN AIRBAG

The connector is in the glove-box-style Shelter Case compartment immediately in front of the fuel filter door.



#### ON GOLD WING MODELS WITH AN AIRBAG

The connector is in the travel trunk, up towards the front left side.

### 2. Find the Update Screen



#### IGNITION SWITCH

The ignition switch can be located directly under the dashboard screen.

### 3. Select Update



#### **FOUR-WAY KEY/ENT SWITCH**

The Four-way Key/ENT Switch can be located in the center of the left handlebar cluster.



#### **INTERFACE DIAL**

The interface dial is located directly underneath the ignition switch.